

NTF Series

TRIAC Dimming LED Driver


可控硅调光LED驱动器

Features:

- Dimmable with leading edge or trailing edge dimmer
- Constant current driver
- Captured terminal screws
- Wide output voltage extended down to 50%
- Analogue flicker-free
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II
- Smooth dimming compatible with most dimmer
- Dimming range from 1...100%
- Suitable for class I & II luminaires



- 适用普通可控硅前切相或后切相调光器
- 恒流驱动
- 螺丝锁紧大接线端子，方便多规格线接驳
- 50%宽输出电压范围
- 无频闪
- 输出开路，过载，短路和过温保护
- 符合安全特低电压标准
- 保护等级 II
- 平滑高性能调光，匹配更多的调光器
- 调光范围 1...100%
- 适用于 I 类和 II 类灯具

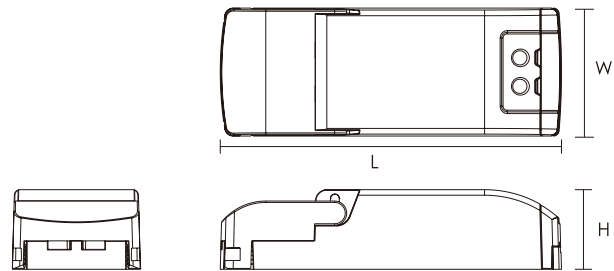

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
D18009NTF	220-240	9	180	25-50	0.95	81	<1.0	-20...+50	80	SELV	109x40x22	70
D23009NTF	220-240	9	230	20-40	0.95	80	<1.0	-20...+50	80	SELV	109x40x22	70
D26009NTF	220-240	9	260	17-35	0.95	80	<1.0	-20...+50	80	SELV	109x40x22	70
D30009NTF	220-240	9	300	15-30	0.95	80	<1.0	-20...+50	80	SELV	109x40x22	70
D35009NTF	220-240	9	350	13-26	0.95	80	<1.0	-20...+50	80	SELV	109x40x22	70
D50009NTF	220-240	9	500	10-18	0.95	79	<1.0	-20...+50	80	SELV	109x40x22	70
D70009NTF	220-240	9	700	10-13	0.95	78	<1.0	-20...+50	80	SELV	109x40x22	70
D26012NTF	220-240	12	260	23-46	0.95	81	<1.0	-20...+50	80	SELV	109x40x22	70
D30012NTF	220-240	12	300	20-40	0.95	81	<1.0	-20...+50	80	SELV	109x40x22	70
D35012NTF	220-240	12	350	18-35	0.95	80	<1.0	-20...+50	80	SELV	109x40x22	70
D50012NTF	220-240	12	500	12-24	0.95	80	<1.0	-20...+50	80	SELV	109x40x22	70
D70012NTF	220-240	12	700	10-18	0.95	78	<1.0	-20...+50	80	SELV	109x40x22	70


CB CE